

the quickest and rainproof portable panel

COMPARISON WITH OTHER PANELS

- ▶ rainproof and shock resistant aluminum body
- ▶ quickest set up and adjustment
- ▶ instantly ready AC & DC through Smart Vlock AC adapter
- ▶ more than bi-colour 2700 to 6500 K
- ▶ digital display with shock resistant buttons
- ▶ perfect color rendition & consistency lamp to lamp
- ▶ affordable European quality
- ▶ 2 years warranty 100% made & designed in Barcelona (Spain)



www.thelight.com.es
info@thelight.com.es

Intellectual Property

THELIGHT VELVET light technology is protected under
 spanish patents and international patents pending

2016 © Copyright THELIGHT. All rights reserved.



ROBUST

100% Aluminum body

NATURAL & PORTABLE
 VELVET BEAUTY LIGHT HALF SIZE 1X1 LED PANEL



PANELS MADE TO LAST

THELIGHT introduces rainproof **VELVET MINI1**
the same robust, silent powerful & easy to use VELVET quality
under a small & portable housing for Videographers

VELVET MINI1 panel is the most rugged portable
light designed to instantly setup and adjust

VELVET QUALITY WHITE LIGHT MINI 1 produce a soft, natural beauty light to
get perfect skin tones and real colors

SMART AC/DC POWERED VELVET MINI 1 is always ready to operate worldwide
with Vlock battery mount
with Smart Vlock AC Adapter 90-264 VAC

QUICK SET UP Quick access buttons to 3200K & 5600K
Clearly visible digital display and shock resistant
buttons



RAINPROOF
IP54

MORE THAN BI-COLOR VELVET MINI 1 offers more than tungsten
& daylight in the same unit: you can precisely
adjust color temperature from 2700K to 6500K

MADE TO LAST Robust 100% aluminum body make to endure
the toughest working conditions on any
location or studio


- ADVANTAGES**
- ▶ Rainproof & shock resistant aluminum body
 - ▶ 3200K and 5600K quick access dedicated button
 - ▶ More than bi-colour 2700K to 6500K
 - ▶ 100% made & designed in Bcelona (Spain)

VELVET BEAUTY LIGHT

VELVET MINI are workhorse lights to travel and easily
get natural and stylish images

TECHNICAL SPECIFICATIONS VELVET MINI 1

COLOR TEMPERATURE	digitally adjustable 2700K to 6500K
LIGHT INTENSITY	dimable 0 to 100 (smooth and flicker-free)
COLOR RENDER INDEX	Over 90
PHOTOMETRICS	1200 Lux / 111 fc at 1m / 3 feet 150 Lux / 14 fc at 3m / 10 feet
BEAM ANGLE	100°
DIMENSIONS	345 x 190 x 90 mm (panel) 13,6 x 7,5 x 3,5" (panel)
WEIGHT	1,9 Kgs / 4,2 Lbs
POWER DRAW	50 W / 0,45 Amps at 110 VAC
POWER SUPPLY	12-35 VDC through Vlock battery plate Smart Vlock AC Power Adapter 90-246V AC 50/60 Hz
LED RATED LIFE	more than 50.000 hours
COOLING	no noise, fan free passive cooling
PROTECTION & CONSTRUCTION	rainproof IP54 rated, made of black anodized extruded aluminum and black powder coated sheet aluminum
VELVET TECHNOLOGY	OSRAM selected BIN LED + optic diffuser+ CPU software control
OPTIONAL QUICK MOUNTING ACCESORIES	Smart Vlock AC power adapter, Snapgrid, removable barn doors hard cases, soft cases
RIGGING OPTIONS	Aluminum yoke with 16 mm baby receiver / 28 mm junior pin Four sliding threads 1/4" for riggings located on panel side

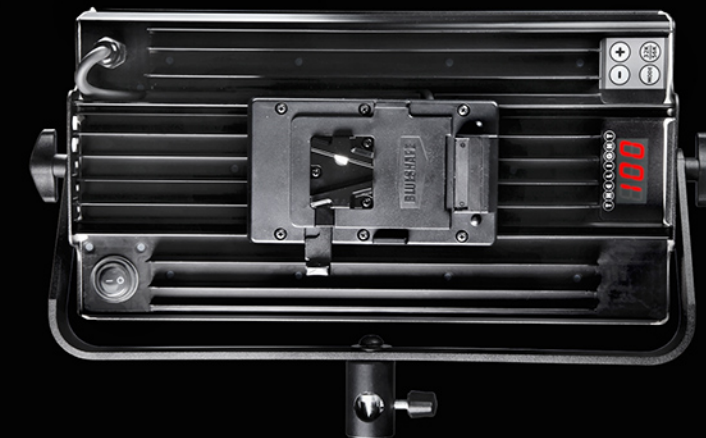

THELIGHT

Specifications subjects to change without notice