

OpenGear Converter HDMI to SDI



Ideal für HDMI-Geräte, die keinen integrierten Kopierschutz besitzen, um den HDMI Ausgang auf SDI inkl. eingebettetem Audio zu konvertieren. Schließen Sie nun HDMI-Videogeräte an SDI an oder setzen Sie HDMI tauglichen Computern einen SDI Ausgang auf!

549 €*

Anschlüsse

SDI Video Output

Automatically matches the SD, HD and 3 Gb/s SDI video input.

Multi Rate Support

Auto detection of SD, HD and Level B 3 Gb/s SDI inputs.

Reclocking


Yes

HDMI

HDMI type A in.

Updates and Configuration

Via USB 2.0 high speed. (480 Mb/s)

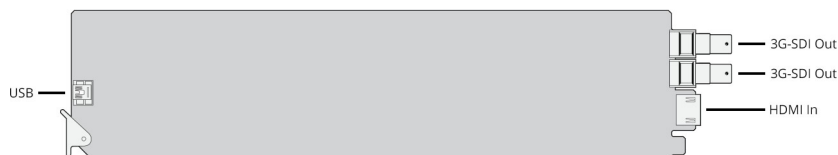

Normen

SDI Format Support

625/25 PAL, 525/29.97 NTSC, 1080PsF23.98, 1080PsF24, 1080PsF25, 1080i50, 1080i59.94, 1080i60, 720p50, 720p59.94 and 720p60.

SDI Video Sampling

4:2:2

HDMI Format Support

625/25 PAL, 525/29.97 NTSC, 625/50p PAL, 525/59.94p NTSC, 1080p23.98/24, 1080i50, 1080i59.94/60, 720p50 and 720p59.94/60.

SDI Compliance

SMPTE 292M, SMPTE 259M, SMPTE 296M, ITU-R BT.656 and ITU-R BT.601.

SDI Audio Sampling

Television standard sample rate of 48 kHz and 24-bit.

HDMI Color Space

YUV and RGB

SDI Video Rates

SDI video connections are switchable between standard definition and high definition.

SDI Color Precision

4:2:2

HDMI Color Precision

4:2:2

SDI Color Space

YUV

SDI Auto Switching

Automatically selects between SD, HD and Level B 3Gb/s SDI.

Copy Protection

HDMI input is unable to capture from copy protected HDMI sources. Always confirm copyright ownership before capture or distribution of content.

Software

Software Control

Mac OS X™ and Windows™ software upgrade via USB.

Internal Software Upgrade

Via included updater application.

Betriebssysteme



Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan oder höher.




Windows 8.1 oder Windows 10.

Settings Control

OpenGear DashBoard network control software or USB software.

Physische Spezifikationen

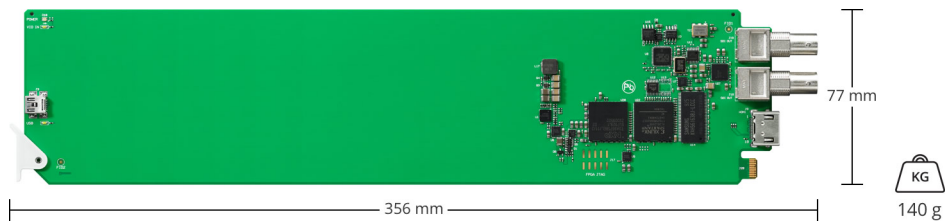

Umgebungsbedingungen

Operating Temperature

0° to 40° C (32° to 104° F)

Storage Temperature

-20° to 45° C (-4° to 113° F)

Relative Humidity

0% to 90% non-condensing

Was ist im Lieferumfang enthalten

OpenGear Converter HDMI to SDI

Garantie

3 Year Limited Manufacturer's Warranty.

Für alle Elemente auf dieser Website gilt das Copyright von Blackmagic Design Pty. Ltd. 2016;
Alle Rechte vorbehalten. Alle Handelsmarken sind Eigentum ihrer jeweiligen rechtmäßigen Besitzer.
*Unverbindliche Preisempfehlung inkl. MwSt zuzüglich Versand- und Zustellungskosten.

Zugelassene Blackmagic Design Reseller