


S-3812A/S

2-ch Simultaneous Fast Charger and Adaptor

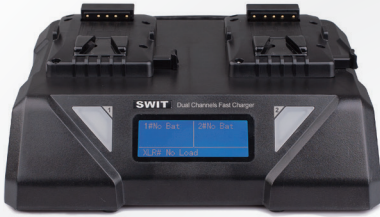

S-3812A: for Gold mount batteries
S-3812S: for V-mount batteries


- ◆ 2-ch simultaneously charging
- ◆ 6A fast charging for SWIT S-8340/8360; S-8113/8180/8183; D-8161
- ◆ 3A charging for other SWIT batteries
- ◆ AC to 4-pin XLR adapting output
- ◆ Battery to 4-pin XLR adapting output
- ◆ Real-time Charging/Adapting info display
- ◆ V-mount / Gold mount option

| | |
|------------------------|---|
| Power | Max 240W |
| Input | AC 100V-240V, 50/60Hz |
| Charging output | DC16.8V, 6A×2 for SWIT S-8340/8360/8113/8180/8183, D-8161 DC16.8V, 3A×2 for other SWIT batteries |
| Adapting output | DC 16.8V, Max 12A/200W |
| Dimension | 272×232×97mm |

Real time Charging info display

Battery info

- Charging/Discharging status
- Real time capacity and percentage
- Real time Voltage/Current
- Remaining time to fully charged
- Remaining time to fully discharged
- Battery cycle times

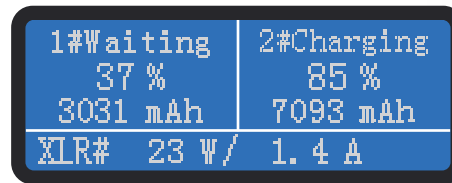

Remark: The battery info display only available with SWIT digital Li-ion batteries: S-8320 / S-8340 / S-8360 / D-8161.
 For other non-digital batteries, the charger will only display real time voltage and current.

Adaptor output status

- Output current and power

4-pin XLR DC output



AC to DC adaptor

Battery to DC adaptor