

yellobrik™

RFR 1000

Yellobrik Rack Frame

- Compact 1 RU design
- Will accommodate up to 14 yellobriks
- External 12VDC power inputs
- Primary and redundant power options
- Power failure alarm GPO outputs



The RFR 1000 is a compact 1 RU high mounting frame designed for yellobriks. Up to 14 yellobriks can be vertically mounted and are mechanically clamped securely in place. Each slot has its own integrated power connector on a central power bus.

The rack has two external 12VDC inputs for power, one for primary power, the second for redundant backup. An optional external power brick is available which provides enough power for any combination of yellobriks. A second unit can be used for redundant backup.

Primary and redundant power LED's are located in the front panel as well as GPO connections for the power supply failure alarms.

While the frame will accommodate all yellobriks, it is ideally suited for the yellobrik fiber converters, which are typically used in larger numbers. Fiber connections are on the front and the SDI copper connection in the rear. A space is left open on one side to route the fiber loops from front to rear making for a very clean installation. The module fiber RX and TX activity LED's can be seen clearly from the front with the modules installed.




Technical Specifications


Power Inputs	External +12VDC primary power input External +12VDC redundant power input Connector: Molex Mini Fit Series5557 Power LED's on front of chassis Primary and redundant power failure GPO alarm outputs
Size	19" Rack mount x 1RU high x 5.70" deep (14.5cm)
Weight	1.6 Kg (3.52 Lbs) - with no modules installed
Model #	RFR 1000
Options	RPS 1000 external power supply (12V 8A) (use 2 units for primary and redundant power protection) Note. Requires IEC 60320 C13 AC power cord (not supplied)
Includes	Rack Frame assembly (empty)



Power connectors on integrated power bus

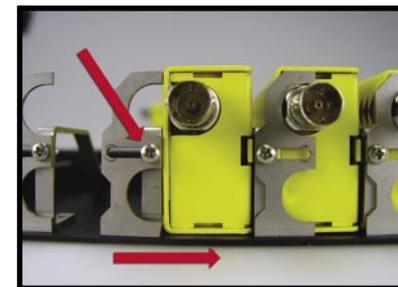

Modules are clamped securely into position

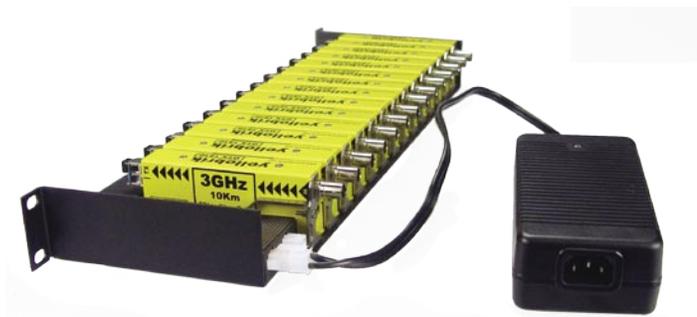

Rear of rack frame showing power connectors and one optional external power brick (use second brick for redundant protection)

LYNXTechnik AG®

www.lynx-technik.com

Brunnenweg 3
D-64331 Weiterstadt
Germany
PH +49 (0) 6150 1817 0
FX +49 (0) 6150 1817 10

26366 Ruether Ave.
Santa Clarita, CA 91350
USA
PH +1 (661) 251 8600
FX +1 (661) 251 8088