






▶ 150 mm ▶ EFP / ENG


Video 25 Plus

The lightweight but powerful solution for EFP / OB

-  Payload range: 8 to 35 kg / 18 to 77 lb
-  Counterbalance: 18 steps
-  7 horizontal and 7 vertical grades of drag, +0
-  Tilt range: +90° to -75°
-  For tripods with 150 mm bowls, integrated flat base fitting

Interface for viewfinder extension

MEASUREMENTS IN MM

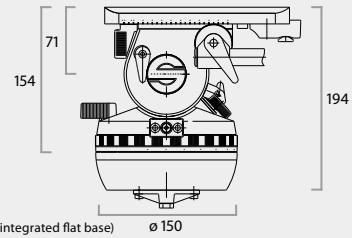

half ball with screw (integrated flat base) ø 150

PAYLOAD TABLE


C.O.G.*	min. kg/lb	max. kg/lb
100/4	10.6/23.4	41.0/90.3
125/5	9.3/20.4	35.7/78.8
150/6	8.2/18.1	31.7/69.9
175/7	7.4/16.3	28.5/62.8
200/8	6.7/14.8	25.9/57.0

*Center of gravity height (mm/in)

PAYLOAD DIAGRAM



DAMPING



CODE







▶ 2500P

SYSTEMS

▶ Pages 72–79
25 EFP 2 CF



Bracket for viewfinder extension

- 
 1063 C.O.G. plate
- 
 6054 Cable clamp V 60
- 
 3908 Adapter FB/150
- 
 3985 Adapter 1/4", 3/8", M8
- 
 3986 Adapter with clamping 1/4", 3/8", M8
- 
 3920 Front box adapter

ACCESSORIES

▶ Pages 64–71