

External wall plug power supply for single yellobrik

- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- Interchangeable Plug
- Single Output
- Class II
- Energy Star 2.0, Efficiency level V

The RPS 1001 AC/DC switching mode external wall plug power supply unit provides 15 watts of continuous output power. This power supply unit is meant to be used with a single yellobrik module.

Electrical Characteristics


V_{in}	Safety Approvals Input Voltage Range		100~240 VAC
	Operate Voltage Range		90~264 VAC
f_{in}	Input Frequency		47~63 Hz
P_o	Output Power Range		15 W (max.)
V_o	Output Voltage Range		11 ~ 13 VDC
I_o	Output Current Range		1.15 ~ 1.36 A
I_{il}	Input Current (Low Line)	I _o =Full load, V _{in} =100VAC	0.4 A (max.)
I_{ih}	Input Current (High Line)	I _o =Full load, V _{in} =240VAC	0.16 A (max.)
I_r	Low Line Inrush Current	I _o =Full load, 25°C, Cool start, V _{in} =100VAC	35~45 A
	High Line Inrush Current	I _o =Full load, 25°C, Cool start, V _{in} =240VAC	70~90 A
Eff	Efficiency	I _o =Full Load, V _{in} =230VAC	84.2%
REG-i	Line Regulation	I _o =Full Load	0.5~1 %
REG-o	Load Regulation	V _{in} =230VAC	4~5 %
OVP	Over Voltage Protection		Nil
OCP	Over Current Protection	Nil, But, Output protected to short circuit conditions	
T_{tr}	Time of Transient Response	I _o =Full Load to Half Load, V _{in} =100VAC	4 ms (max.)
T_h	Hold-Up Time	I _o =Full Load, V _{in} =110VAC	8 ms (min.)
T_s	Start Up Time	I _o =Full Load, V _{in} =100~240VAC	3 s (max.)
V_{p-p}	Ripple & Noise(Peak to Peak)	Full Load, V _{in} =90VAC	200mV _{p-p}
I_{lk}	Leakage Current	V _{in} =240VAC/60Hz	0.25 mA (max.)
TC	Temperature Coefficient	All output	±0.04 %/ °C
P_{no}	No-Load Power Consumption	No load, V _{in} =230VAC	0.1 W
V_{ps}	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242 VDC (min.)

Enviromental

T_o	Operating Temperature	See derating curve
T_s	Storage Temperature	-40~85°C
H_o	Operating Humidity	0~95%
H_r	Storage Humidity	0~95%
MTBF	Operating Temperature at 25 C Calculated per MIL-HDBK-217F	0.1M Hrs (min.)
Pd	Derate linearly from 100% load at 40°C to 50% load at 70°C	




RPS 1001 with interchangeable wall plugs

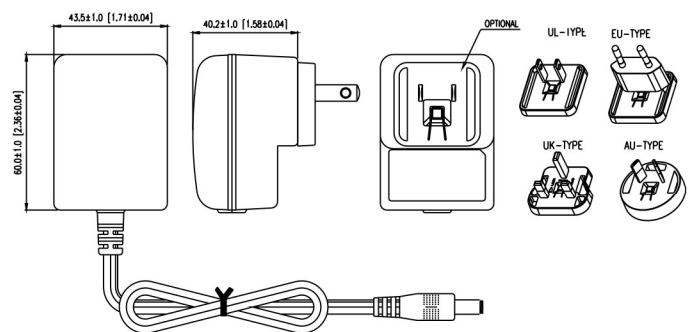

Note:
1. Dimensions are shown in mm.
2. Weight: 165g approx.
3. Optional output connector: See page Appendix.

Derating Curve

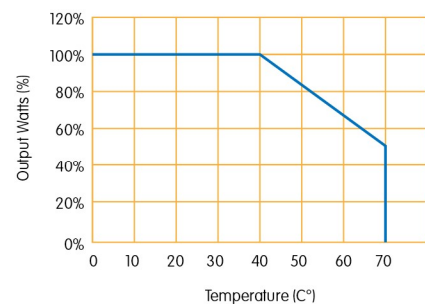

Ordering Information

EAN / UPC	Model	Description
4250479310018	RPS 1001	External wall plug power supply for single yellobrik

Rev 1.0 Specifications subject to change