

# **Ultimatte 12 HD Mini**



Ultimatte 12 HD Mini is an advanced real time keyer designed for creating next generation virtual sets and more with consumer cameras. The HDMI connections are perfect for use with Blackmagic Studio Cameras, Pocket Cinema Cameras and ATEM Mini live production switchers. Plus there's a massive 6 GB frame store for realistic fixed camera virtual sets from pre rendered still frames. Ultimatte 12 HD Mini features broadcast quality algorithms and color science to deliver photorealistic composites.

£439

### Connections

### **SDI Video Inputs**

2

Monitor In for monitor cascade plus Return In for camera control.

## **SDI Video Outputs**

2

### **HDMI Video Inputs**

2

### **HDMI Video Outputs**

1

### Video Input Re-Sync

On all inputs.

### **SDI Rates**


270Mb, 1.5G, 3G.

### **Ethernet**

Up to 1Gb/s for device control and loading stills into Media Pool.

### **Computer Interface**

1 x USB-C 3.0 for device configuration and software updates.

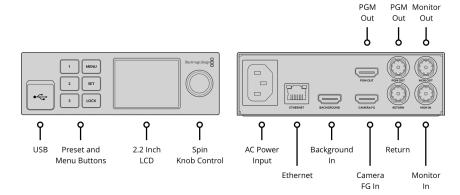

### Standards

### **SD Video Standards**

525i59.94 NTSC, 625i50 PAL

### **HD Video Standards**

720p50, 720p59.94, 720p60 1080i50, 1080i59.94, 1080i60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60

### **SDI Compliance**

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 424M, SMPTE 425M level A and B.

### **Video Sampling**

4:2:2

### **Color Precision**

10-bit

### **Color Space**

REC 601, REC 709.

### **Multiple Rate Support**

Auto detection of SD and HD.

### Composite Sources

### Foreground

1 x HDMI In

### Background

1 x HDMI In Still from Media Pool

### **Background Matte**

Internal Window Still from Media Pool

**Garbage Matte** Internal Window Still from Media Pool

### **Holdout Matte**

Internal Window Still from Media Pool

### Layer

Still from Media Pool

### Layer Matte

Internal Window Still from Media Pool

# Composite Outputs

### **Program**

1 x HDMI 1 x 3G-SDI

Monitor

### Monitor In

1 x 3G-SDI

for monitor cascade

### **Monitor Out**

1 x 3G-SDI

For monitoring Program, Foreground Input, Background Input, Combined Matte, Internal Matte, Fill Out, Layer Input, Background Matte Input, Garbage Matte Input, Holdout Matte Input, Layer Matte Input, Processed Layer Matte, Processed Holdout Matte, Processed Garbage Matte, Processed Background Matte,

Screen Correction.

### Media Pool

### **Background Still Image Formats**

TGA, TIFF, BMP, PNG, JPG.

# Background with Alpha Still Image Formats

TGA, TIFF, BMP.

# Layer Image Still Image Formats

TGA, TIFF, BMP, PNG, JPG.

# Layer with Alpha Still Image Formats

TGA, TIFF, BMP.

### **Garbage Matte Still Image Formats**

TIFF, BMP, PNG, JPG.

### **Holdout Matte Still Image Formats**

TIFF, BMP, PNG, JPG.

### Media Pool Memory

6GB non-volatile internal storage.

### Displays

Built in 2.2 inch color display for device name, video preview, video standard audio meters, status and menus.

### Control

### **Front Panel**

2.2 inch color display, 3 preset buttons, 3 menu buttons and spin knob.

### **Control Connection**

Network or direct Ethernet connection to a computer running Ultimatte Software Control or Ultimatte Smart Remote 4.

### **Software Control**

Ultimatte Software Control supported on Mac™ or Windows™ computers.

### **Hardware Control Panel**

Ultimatte Smart Remote 4

### **Camera Control**

Blackmagic camera control and tally supported when used with compatible cameras and ATEM switchers.

### **Custom Control**

Ethernet protocol included in the <u>Ultimatte instruction manual.</u>

### Software

### **Software Updates**

Using USB-C or Ethernet connection to Mac<sup>™</sup> or Windows<sup>™</sup> computers.

### Configuration

Ultimatte IP address is set via the front panel or Ultimatte setup utility connected via USB.

# **Operating Systems**



Mac 11.0 Big Sur, Mac 12.0 Monterey or later.



Windows 10, 64-bit. Windows 11.

# Power Requirements

### **Power Supply**

**Power Usage** 

1 x Internal 100-240V AC, 50/60Hz

12W

# Accessories

### **Optional Accessories**

Ultimatte Smart Remote 4

# Physical Installation

One third rack unit width, 1 rack unit height.

# **Physical Specifications**



# **Environmental Specifications**

### **Operating Temperature**

0° to 40°C (32° to 104°F)

# Storage Temperature

-20° to 60°C (-4° to 140°F)

### **Relative Humidity**

0% to 90% non-condensing.

What's Included	
Ultimatte 12 HD Mini Welcome wallet with QR code for software download	
Warranty	
12 Month Limited Manufacturer's Warranty.	
All items on this website are copyright Blackmagic Design Pty. Ltd. 2022, all rights reserved.  All trademarks are property of their respective owners. MSRP excludes VAT and local shipping costs.  This website uses remarketing services to advertise on third party websites to previous visitors to our site.  You can opt out at any time by changing cookie settings. Privacy Policy	
Blackmagic Design Authorized Reseller	