



## 9 Channel CWDM Multiplexer / Demultiplexer [1450nm - 1610nm]

- Send / receive up to 9 channels over a single fiber
- 1450nm to 1610nm (ITU-T G.694.2)
- Passive operation (no power required)
- Combine with OCM 1891 for 18 channels
- LC/PC single mode optical connections
- Optional ½ RU 19" rack frame

The **OCM 1892** is a compact CWDM passive 9 channel optical multiplexer / demultiplexer designed to send or receive up to 9 individual signals over a single fiber link. The module has an UPG (Upgrade) port to connect to the OCM 1891, which expands the capability of the modules to 18 CWDM channels

The modules can be used standalone or integrated into the optional RFR 1018 1/2 RU 19" rack frame, ideal for system installations.

Ideally suited for use with the CWDM yellobrik fiber modules (all 18 wavelengths available).

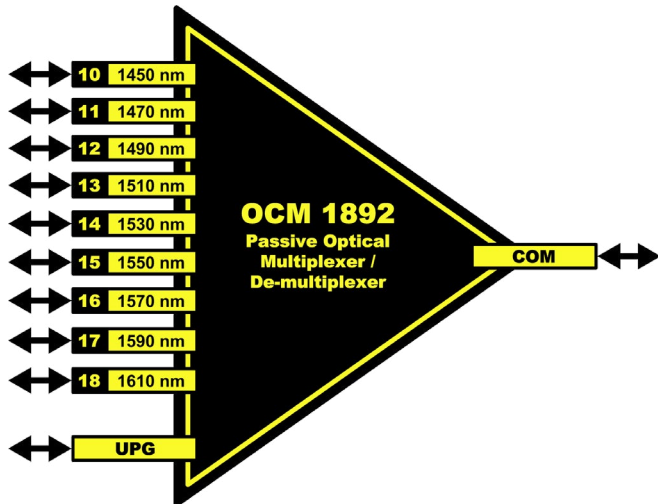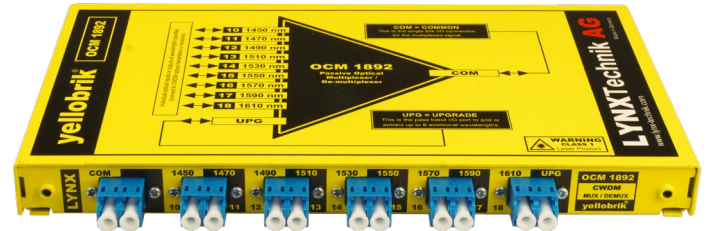

Optional **RFR 1018** ½ RU 19" Rack chassis with 2 x OCM modules

### Technical Specifications

<b>Optical I/O</b>	9 x Fiber Optic I/O channels (10 through 18) Center frequencies taken from ITU-T G.694.2 [1450,1470,1490,1510,1530,1550,1570,1590,1610 nm]
	1 x COM (common) connection = multiplexed I/O
	1 x UPG (Upgrade) I/O connection (pass band connection to OCM 1891 module)
	LC/PC connectors SMF (single mode)
	Channel Insertion loss: 1.35dB Nominal / 2.7dB Max. UPG Insertion loss: 1.35dB Nominal / 2.7dB Max.
	Polarization dependant loss: max 0.2dB
	Return Loss: > 45dB
	Isolation (to adjacent channel): > 30dB
	Directivity > 55dB
	Temp. dependant loss: < 0.005dB/°C
	Temp. dependant change of wavelength: < 0.003nm/°C
	Max. input power: 500mw
	Single or full duplex operation
<b>Power</b>	None required (passive operation)
<b>Physical</b>	Size: L: 199mm (7.83") x W: 130mm(5.12") x H: 19mm(0.75") incl. connectors Weight: 230g (8.1oz)
<b>Model #</b>	OCM 1892 - ( EAN# 4250479318922 )
<b>Includes</b>	Module

