

O SP 5812 M

fiber

SERIES 5000

CardModules

1 > 2 Optical Splitter (90%-10%)

Description




The OSP 5812 M is a 1 > 2 optical splitter / combiner. The optical input is split into 2 outputs, one with 90% and the other with 10%, which is useful for monitoring applications.

The module is passive in operation, meaning it requires no power, and is mechanically compatible with all Series 5000 rack frames and installs from the rear of the rack.

Features

- Precision 1>2 optical splitter
- 90% / 10% split ratio
- LC - PC connections (singlemode)
- Compatible with all Series 5000 rack frames (2RU and 1RU)
- Occupies one card slot

FIBER O SP 5812 M

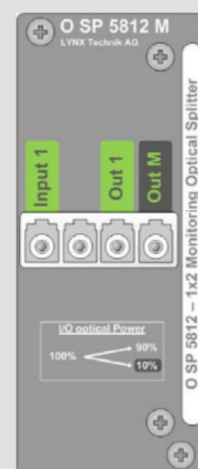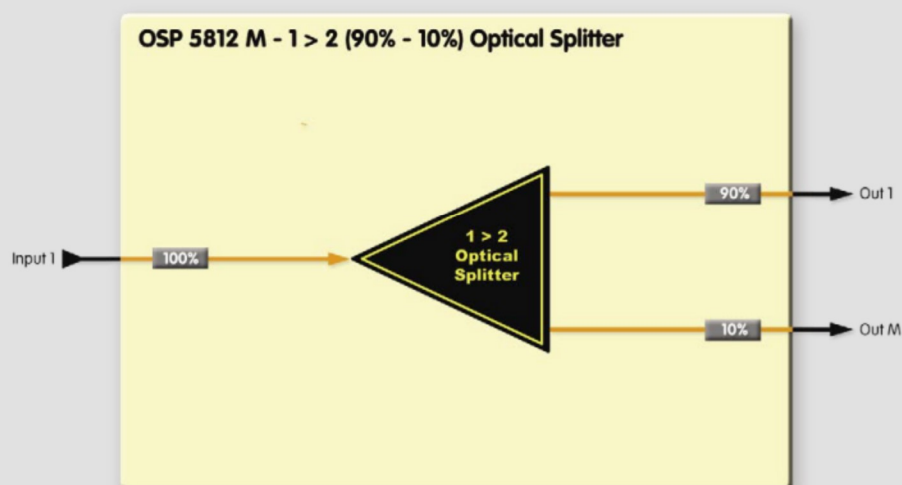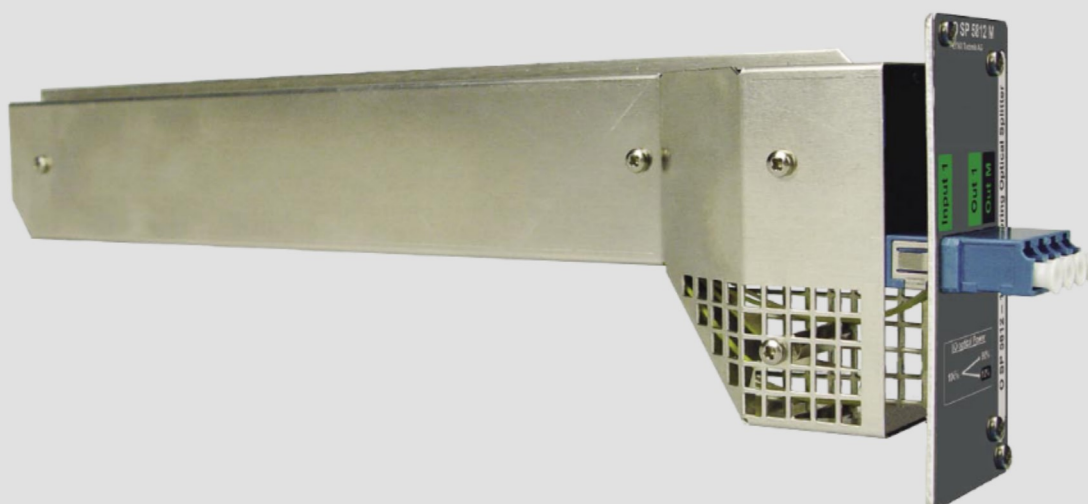

Backplane

1 > 2 Optical Splitter (90%-10%)

Specifications

Optical I/O

Input	1
Outputs	2
Connector type	LC - PC (singlemode)
Operating Wavelengths	1260nm - 1650nm

Performance

Insertion loss (incl. connector)	4.0 dB
Split ratio %	90/10
Polarization dependant loss	max 0.3dB
Return Loss	> 55dB
Directivity	> 55dB
Max input power	500mw

Mechanical

Size	85mm x 286mm (not incl. connectors)
Weight	150 g

Ambient

Temperature	-20°C to 85°C Maintaining specifications
Humidity	90% Max non condensing

Specifications subject to change

Ordering Information

Model #	Part Number	Description	Includes
O SP 5812 M	1000025812	1>2 Optical Splitter (90%-10%)	Card/Module + Mounting Screws + Reference Manual (on CD)