




Betrieb von zwei Huawei E8372 Modems an einer LiveU Solo:

Damit die LiveU Solo Einheit korrekt mit zwei Huawei E8372 Modems gleichzeitig arbeiten kann, muss bei **einem** der Modems die standartmäßige DHCP IP Adresse geändert werden.

Hierzu gehen Sie folgendermaßen vor:

1. Um auf die Weboberfläche des Modems zuzugreifen, stecken Sie das Modem in den USB Port eines Computers und geben im Browser <http://192.168.8.1/html/home.html> ein.
2. Klicken Sie auf „Anmelden“ und melden Sie sich dort mit Benutzername „admin“ und dem Passwort „admin“ an.
3. Klicken Sie oben auf „Einstellungen“ -> links „WLAN“ -> dann auf „DHCP“.
4. Ändern Sie die IP-Adresse von 192.168.8.1 auf **192.168.9.1**.
5. Klicken Sie anschließend auf „Übernehmen“.

Achtung: Anschließend ist das Modem nur noch über 192.168.9.1 über die Weboberfläche erreichbar.

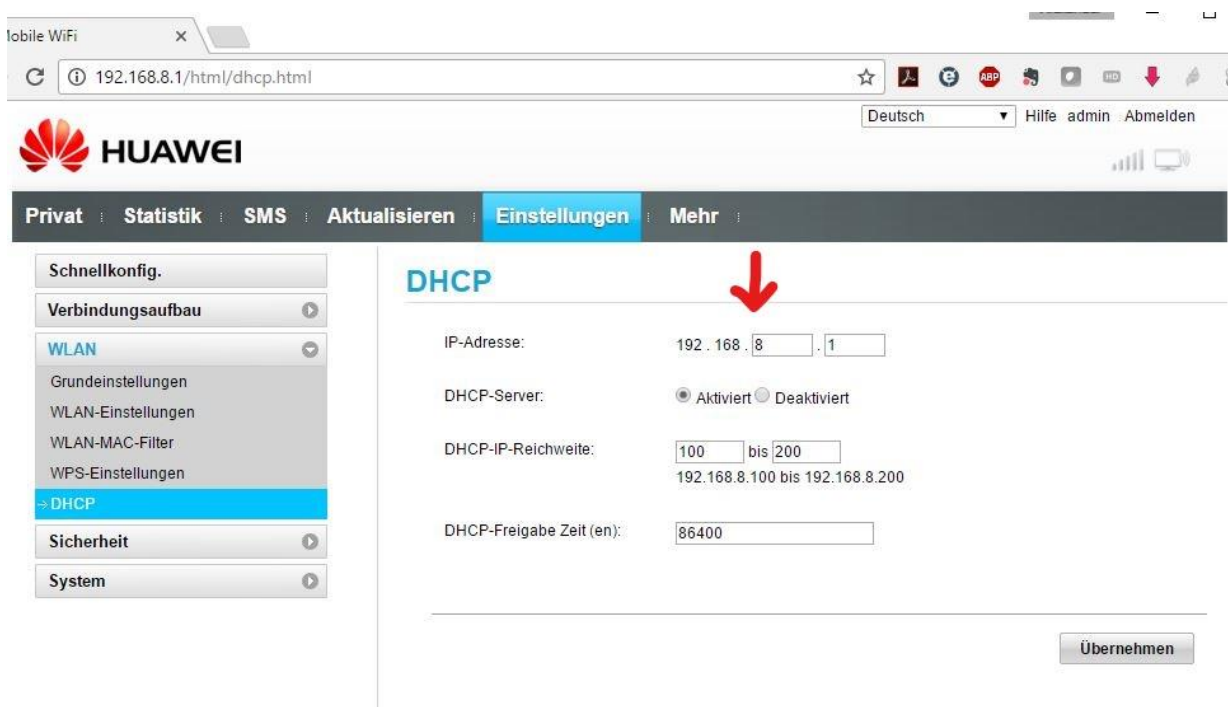

The screenshot shows the Huawei E8372 modem web interface. The browser address bar shows 192.168.8.1/html/dhcp.html. The page title is "DHCP". The "IP-Adresse:" field is set to "192.168.8.1", with a red arrow pointing to the "8" in the second octet. The "DHCP-Server:" is set to "Aktiviert". The "DHCP-IP-Reichweite:" is set to "100 bis 200" (192.168.8.100 bis 192.168.8.200). The "DHCP-Freigabe Zeit (en):" is set to "86400". The "Übernehmen" button is visible at the bottom right.