

# Assembly Instructions

## Wall Mount Bracket

# WMB-PZ100

## Assembly and Installation Instructions



Thank you for purchasing the Wall Mount Bracket. Please carefully read these assembly and installation instructions before beginning assembly.

### Safety Precautions

Please read and understand these safety precautions before using this product.

### Symbols

To highlight usage precautions and product depictions to assure safe and correct product usage and to avoid danger or injury to persons using this product or other persons, several symbols are used.

-  **Warning** Improper handling in disregard of these notices may result in body injury and even death.
-  **Caution** Mishandling of the unit in disregard of these notices may result in minor injury or damage to the unit

### Assembly/Installation Precautions

#### Warning

- Attaching this product to dome camera other than those authorized may result in the dome camera falling over or falling down, potentially causing damage or bodily injury.
- To assure secure installation when attaching this product to the wall, separately provide appropriate anchors, screws or bolts. Do not improperly attach, or use improper anchors, screws or nuts. Doing so may result in the dome camera or bracket falling over or falling down, potentially causing damage or bodily injury.
- Assemble all provided nuts and screw securely. Failure to do so may result in the dome camera falling over or falling down, potentially causing damage or bodily injury.
- Do not install in unstable locations such as uneven or sloped surfaces or locations subject to vibration or shock. Doing so may result in the dome camera falling over or falling down, potentially causing damage or bodily injury.


#### Caution

- To avoid against bodily injury or damage, be sure that you have sufficient working area before beginning assembly

### Tools required for assembly

Handtool: Slotted screwdriver

### Parts List

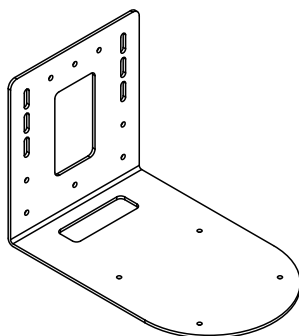


- 1 x Wall Mount Bracket:
- 4 x M4 DIN7985 Screw
- 4 x M4 Safety Nut




Please contact the store where you purchased the product if any parts are missing

- Locate the Ceiling Mount Bracket into KY-PZ100 carton box.

 **Caution** • To avoid injury to fingers, take care to not catch your finger between the dome camera and the Ceiling Mount Bracket.


1. Attach the Ceiling Mount Bracket (a) to Wall Mount Bracket (b) using the 4 M4 DIN7985 Screws and 4 Safety Nut. See the right position on the below figure

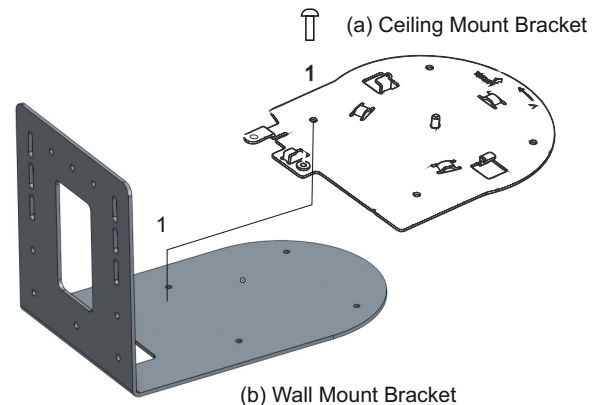

- 2) Fix the assy block to wall by using appropriate screws and anchors (not provided).

3. Attach the KY-PZ100 camera body to the bracket assy block. Place, fit, insert and rotate the body until the unit is properly fix.

Screw tight the retaining screw between body camera and ceiling mounting bracket to avoid rotation (c).

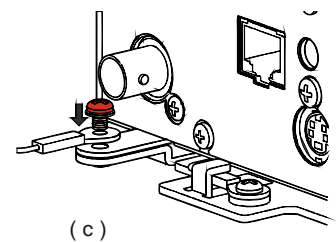

Follow KY-PZ100 installation instruction to fix the fall prevention wire for camera (d)

